


光阑调节手柄(整周孔3个均布)

对焦固定手柄(整周孔3个均布)

像面

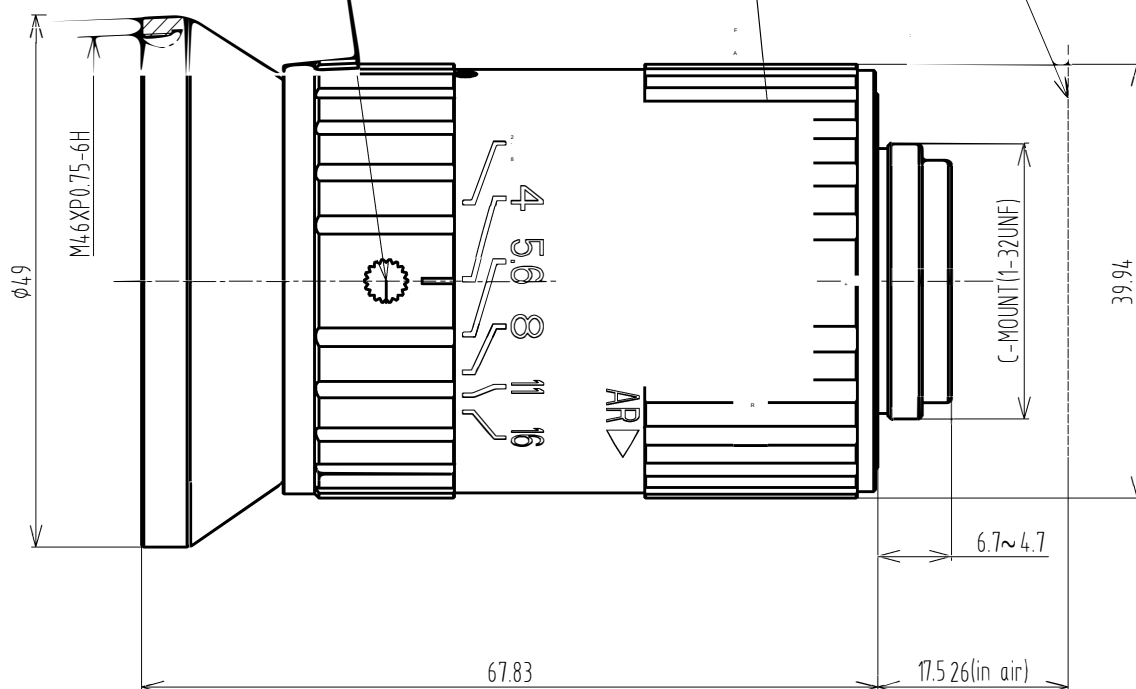


1.4" F2.8/16 C Mount

Working distance

Optical Magnification

1.4" Field of View(mm)

Focal Length		f=16mm	mm		H	V
Max Diameter (Ratio)		F=1:2.8~16	2000	0.0080X	2384.0	1616.0
Picture Size		1.4"(18.96×12.86mm)	1000	0.0158X	1201.2	813.6
Angle	H	61.4°	900	0.0176X	1083.2	733.6
	V	43.83°	800	0.0197X	964.4	653.2
	D	71.27°	700	0.0225X	846.4	573.2
Object Dimension at 300mm	H	372.6mm	600	0.0262X	728.0	492.8
	V	252.2mm	550	0.0285X	668.8	452.8
	D	448.8mm 	500	0.0312X	609.2	412.8
Distortion		<0.70%	450	0.0346X	550.4	372.8
Focus distance(min)		0.15m	400	0.0388X	450.8	332.4
Flange back		17.526mm in air	350	0.0441X	432.0	292.4
Back focus		11.7mm(min)	300	0.0511X	372.8	252.4
Filter screw size		M46 X P0.75	250	0.0608X	313.2	212.0
Front/Rear Effective Dia		Front $\phi 33$ mm Rear $\phi 18$ mm	200	0.0750X	254.0	172.0
Mount		C-Mount	150	0.0979X	194.8	131.6
Temperature Range		-10~+50°C				
Storage Temperature Range		-20~+60°C				

TOLERANCE:
LINEARITY TOLERANCES ± 0.05
ANGULAR TOLERANCES ARE $\pm 30'$
DRAFT ANGLES AREA $\pm 0.5^\circ$ /SIDE

材料(环保)

单位 比例

mm 1:5.1

F	4	1	FA1645A2022112201	2022.11.22	设计			名称	FA1645A 规格	页码
	3	/	FA1645A2022111501	2022.11.15	校对					1/1
	2	1	FA1645A2022110201	2022.11.2	审核			部番	FA1645A SPEC	版本
	版本	处数	更改文件号	担当	变更日期	批准		商品代号		V04