
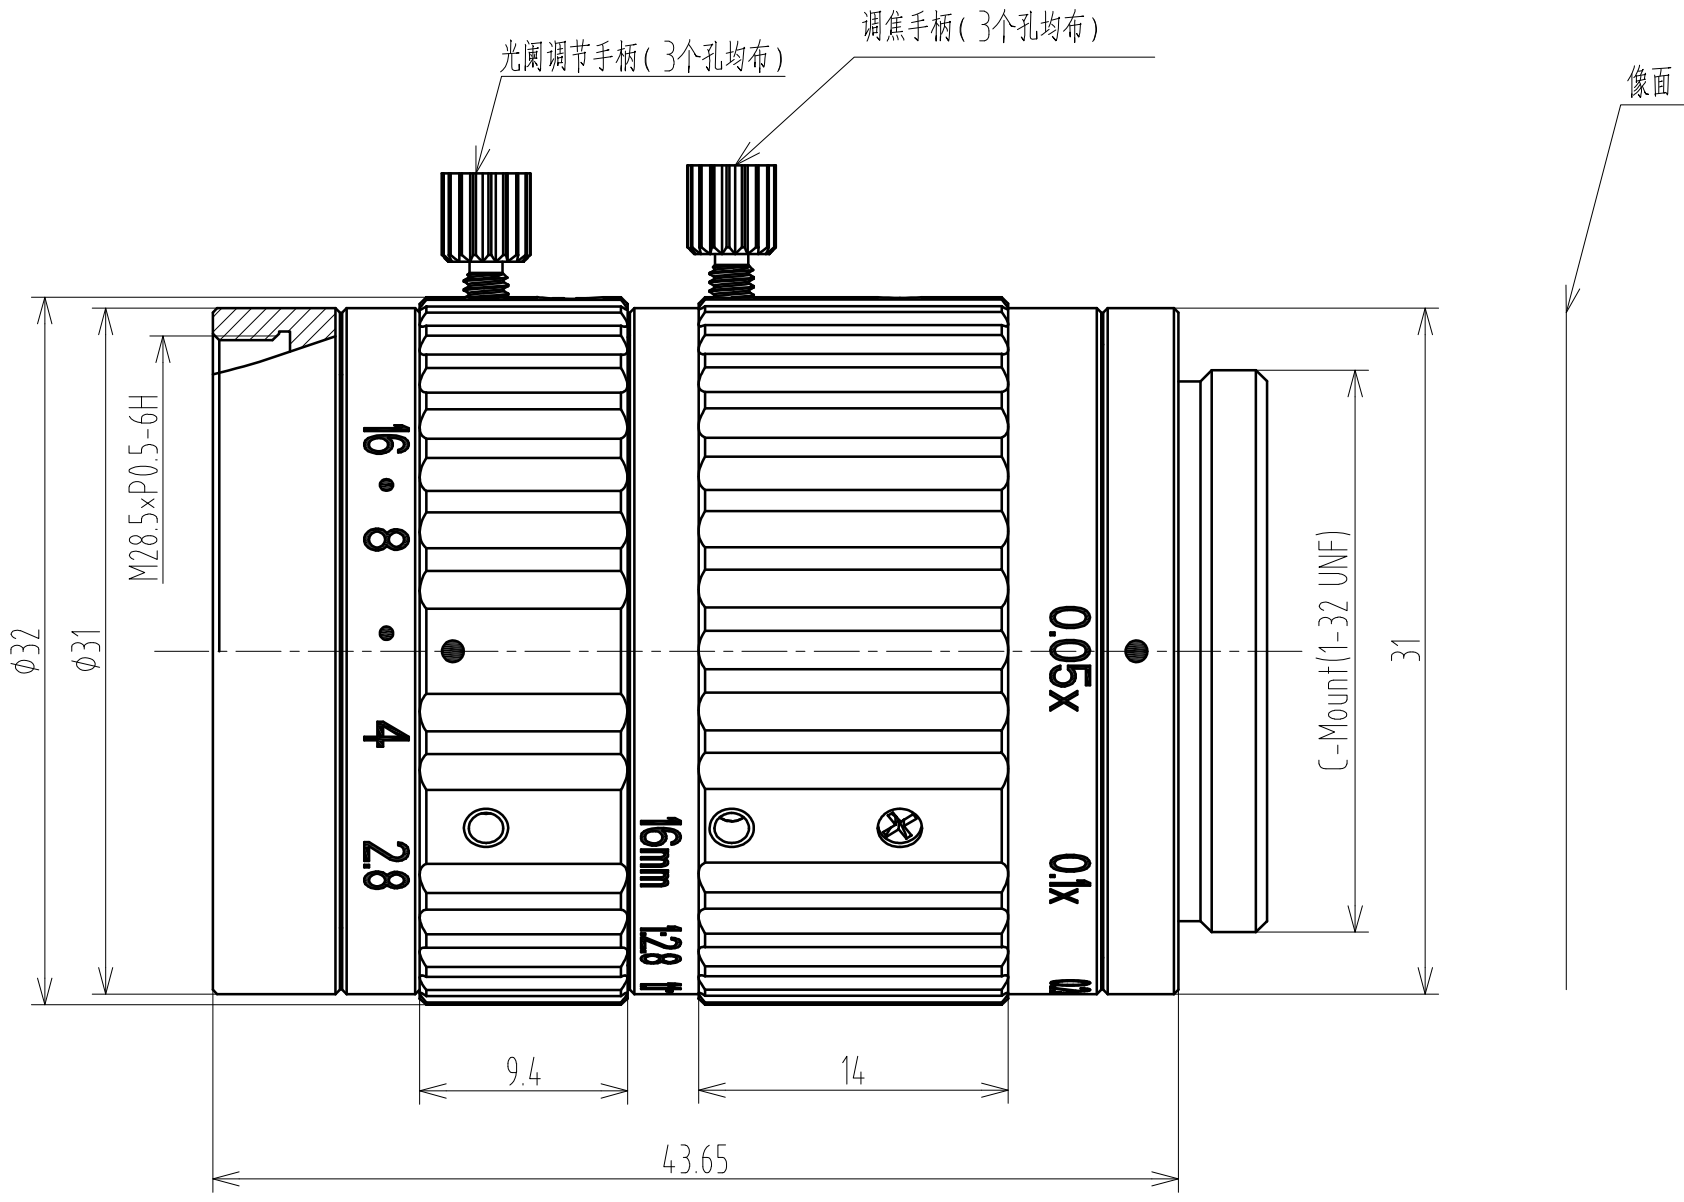




1.1" F 1:2.8 /16C Mount

EFL		16mm					
F No.		2.8~16(±10%)					
Flange back		17.526mm					
Mount		C-Mount					
O/I		115.5~606.9mm					
Distortion (TV)		<0.33%					
Storage Temperature Range		-20~+60°C					
Working distance	Optical Magnification			FOV(mm)			
		1.1"(φ17.6)		1"(φ16)		2/3" (φ11)	
		H	V	H	V	H	V
52	-0.25X	56.6	42	51.2	38.4	35.2	26.4
66	-0.2X	66.4	50	62.4	46.8	42.9	32
94	-0.15X	92.8	70	84	63	58	43.5
152	-0.10X	142	106	144	108	89	66.8
321	-0.05X	284	213	260	195	179	134
546	-0.03X	474	356	433	325	299	224

					TOLERANCE : LINEARITY TOLERANCES ±0.05 ANGULAR TOLERANCES ARE±30° DRAFT ANGLES AREA±0.5°/SIDE			材 料 (环 保)		单 位	比 例
											mm
					设 计			名 称	ML1610A规格书		页 码
					校 对						1/1
					审 核			代 号	ML1610A-SPEC		版 本
标记	处数	更改文件号	担当	变更日期	批 准						V0