
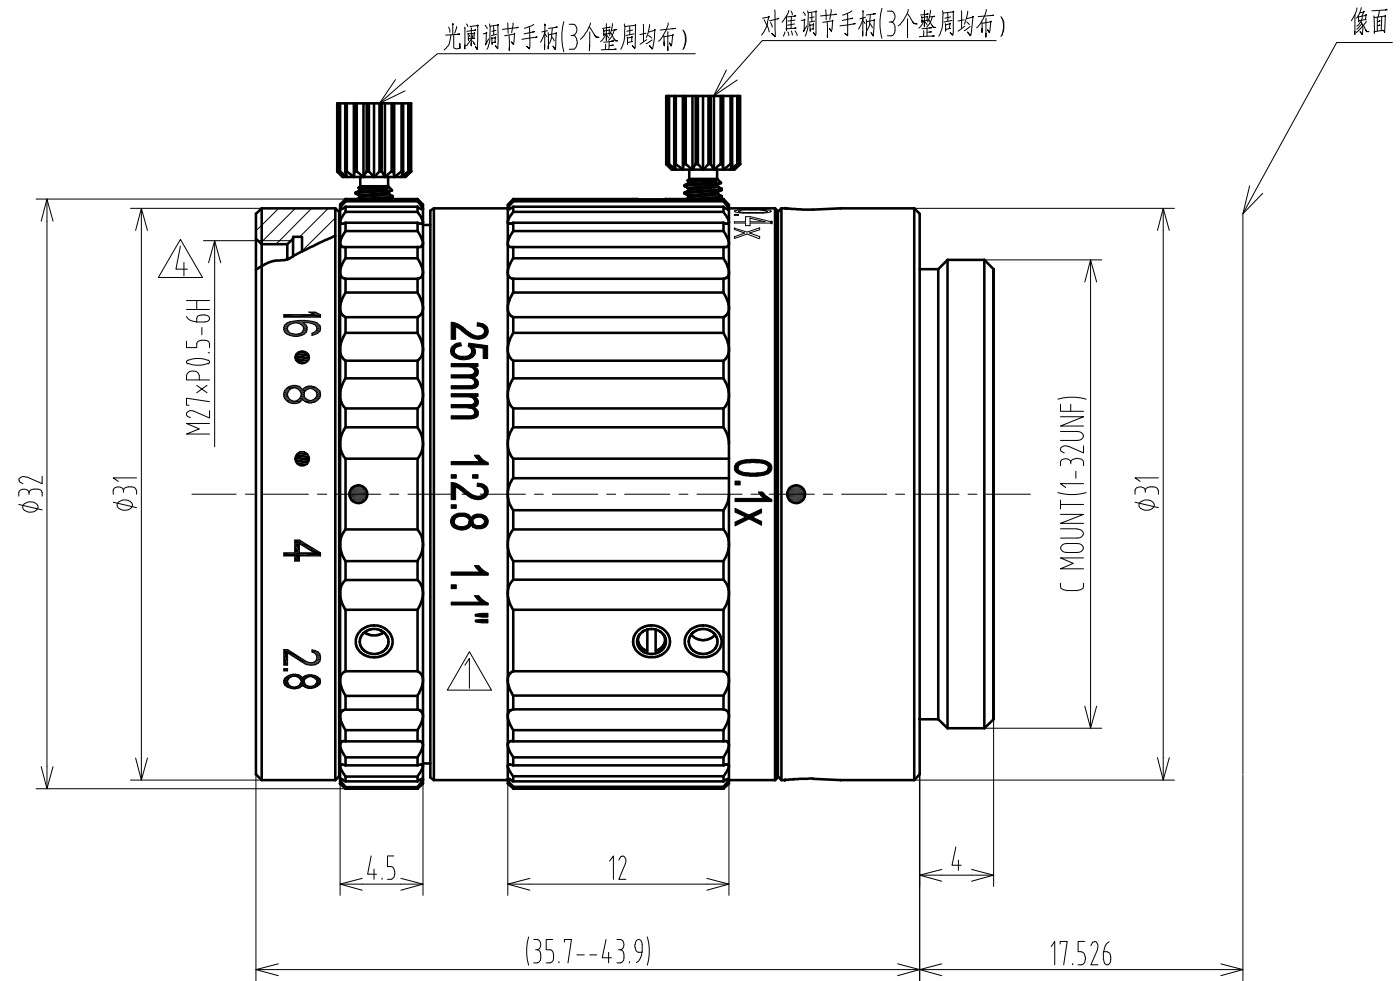




1.1" F 1:2.8 /25C Mount

EFL		25mm					
F No.		2.8~16(±10%)					
Flange back		17.526mm					
Mount		C-Mount					
O/I		126~314.1mm					
Distortion (TV)		<0.07%					
Storage Temperature Range		-20~+60℃					
Working distance	Optical Magnification			FOV(mm)			
		1.1"(ø17.6)		1"(ø16)		2/3" (ø11)	
		H	V	H	V	H	V
 65	-0.4X	35	26	32	24	22	16.5
74.4	-0.35X	40	30	35.6	27.4	25	18.8
85.4	-0.3X	47	35	42.6	32	29	22
103.4	-0.25X	56	42	51	38	35	26
125.4	-0.2X	70	52.8	64	48	44	33
173.4	-0.15X	93	70	85	64	58.6	44
260.4	-0.1X	140	105	128	96	88	66

					TOLERANCE : LINEARITY TOLERANCES ±0.05 ANGULAR TOLERANCES ARE±30' DRAFT ANGLES AREA±0.5°/SIDE		 三角法		材 料 (环 保)		单 位	比 例
 4	1			2017-09-27							mm	2.5:1
 3	1			2017-09-11	设 计			名 称	ML2510A规格书		页 码	
 2	1			2017-08-22	校 对						1/1	
 1	1			2017-08-07	审 核			代 号	ML2510A-SPEC		版 本	
标记	处数	更改文件号	担当	变更日期	批 准						V4	