
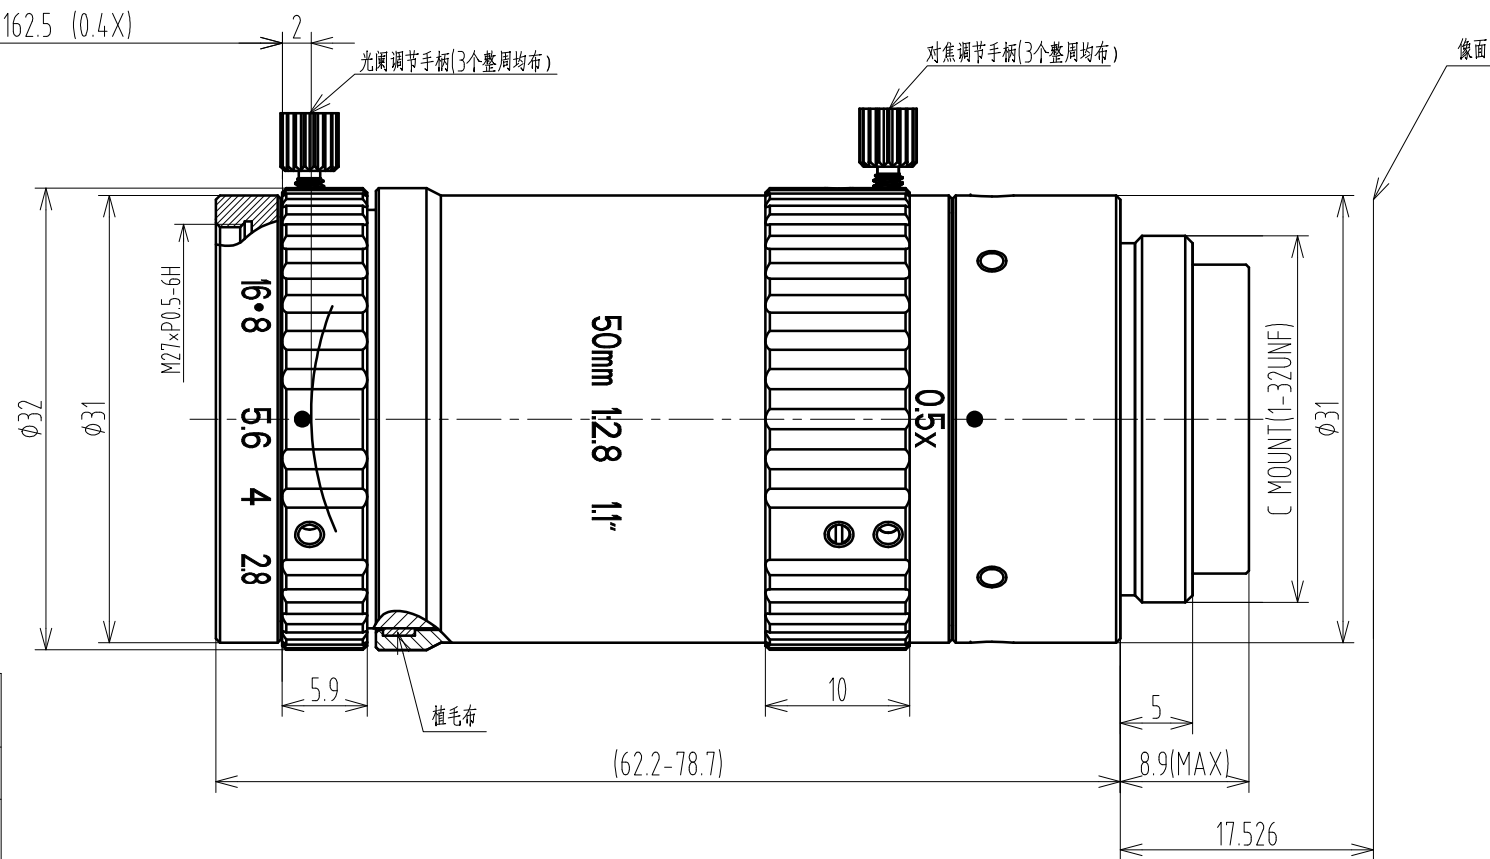




1.1" F 1:2.8 /50 C Mount

EFL		50mm					
F No.		2.8~16(±10%)					
Flange back		17.526mm					
Mount		C-Mount					
O/I		195.6~220.1mm					
Distortion (TV)		<0.05%					
Storage Temperature Range		-20~+60℃					
Working distance	Optical Magnification			FOV(mm)			
		1.1"(φ17.6)		1"(φ16)		2/3" (φ11)	
		H	V	H	V	H	V
115.4	-0.6X	23.3	17.6	21.2	15.9	14.7	11
123.4	-0.55X	25.5	19.1	23.1	17.3	16	12
132.4	-0.5X	28	21	25.4	19	17.6	13.2
162.5	-0.4X	35	26.2	31.8	23.8	22.1	16.5

					TOLERANCE : LINEARITY TOLERANCES ±0.05 ANGULAR TOLERANCES ARE±30' DRAFT ANGLES AREA±0.5°/SIDE			三角法	材 料(环 保)	单 位	比 例
										mm	2:1
					设 计		名 称	ML5010D规格书		页 码	
					校 对					1/1	
					审 核					版 本	
标 记	处 数	更改文件号	担 当	变更日期	批 准		代 号	ML5010D-SPEC		V01	