
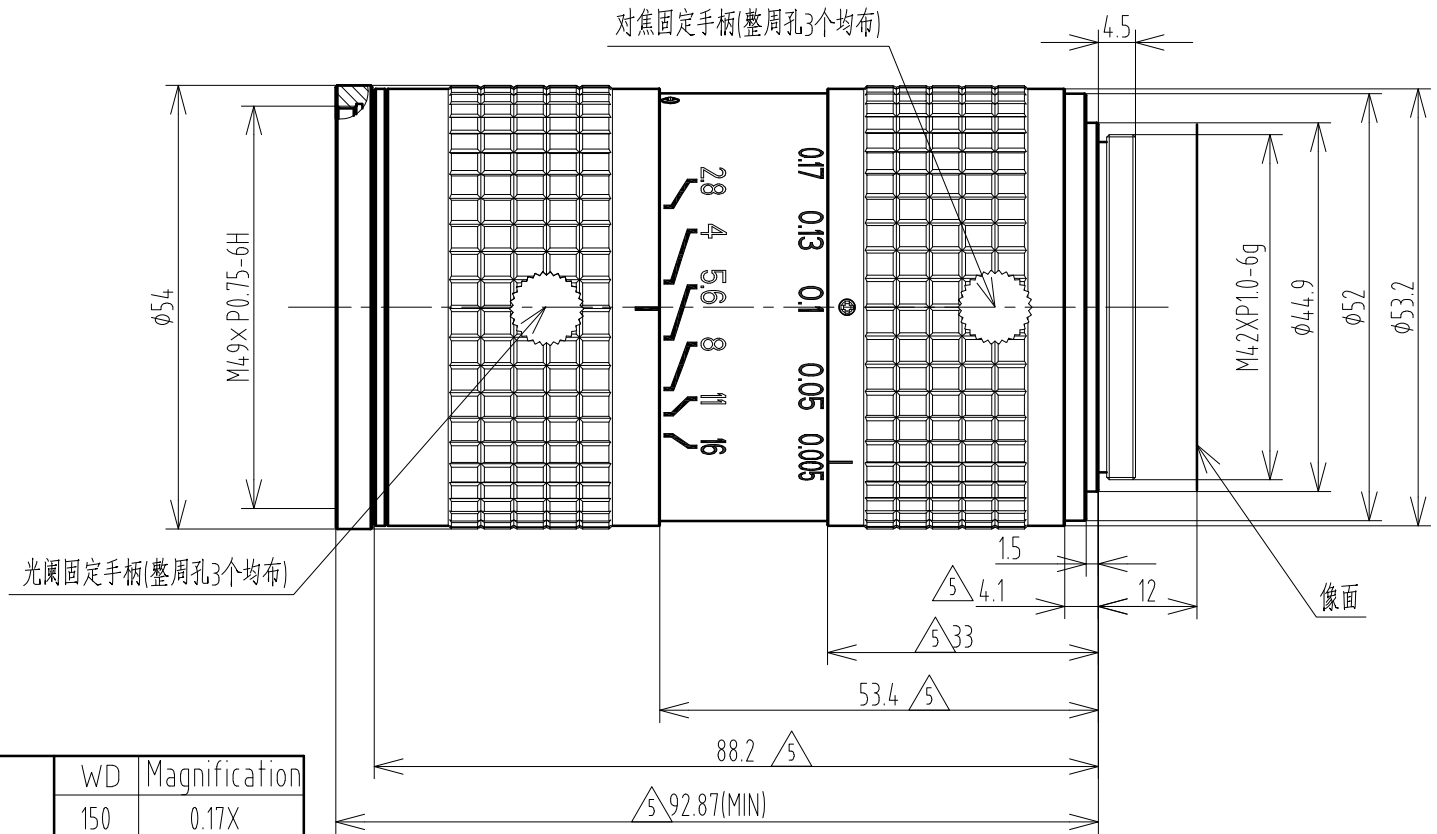




Main Specification		WD	Magnification
		150	0.17X
Working Distance	150-5000	200	0.132X
Magnification Range	0.17X-0.005X	220	0.121X
Max image	φ30	250	0.107X
F.NO	F=2.8-16	300	0.09X
EFL	28±5%	400	0.068X
FOV(D)	55°	500	0.05X
Flange Focal Distance	12	600	0.046X
ENP Diameter	φ9.96	800	0.035X
Distortion	<0.3%	1000	0.028X
Rel.ill	>69%	1500	0.019X
Dimensions	φ54×96.87	2000	0.014X
Filter screw size	M49XP0.75	3000	0.009X
Mount	M42XP1.0	5000	0.005X

					TOLERANCE : LINEARITY TOLERANCES ±0.05 ANGULAR TOLERANCES ARE±30' DRAFT ANGLES AREA±0.5°/SIDE		三角法 		材 料(环 保)	单 位	比 例
	5	LS04028A2022110201		2022.11.2					---	MM	1:1
	1	LS04028A2022031401		2021.10.12	设 计			名 称	LS04028A规格书		页 码
	整体	LS04028A2022011301		2021.10.12	校 对						1/1
	整体	LS04028A2021101201		2021.10.12	审 核						版 本
标记	处数	更改文件号	担当	变更日期	批 准			代 号	LS04028A-SPEC		V05