
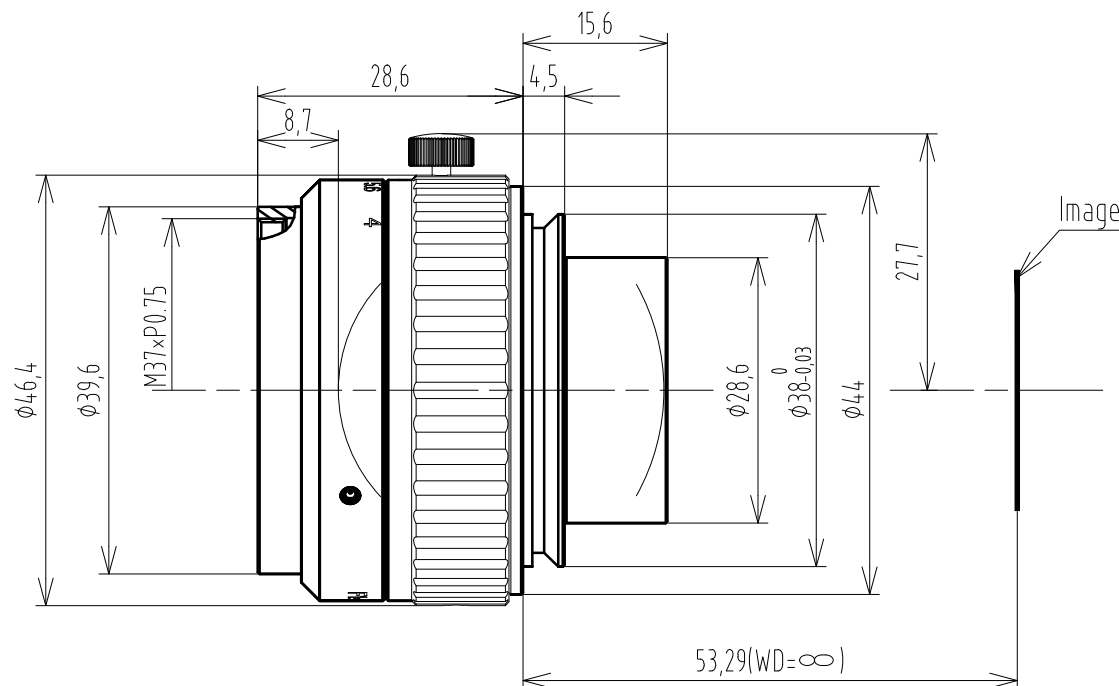




Main Specification				1												
Magnification	0.04 X	0.167X	0.33 X													
Working Distance	1557.4±5	404.4±5	218.97±5													
Image Distance	40.49±2.5	48.07±2.5	58.24±2.5											H ₁	15.78	
Conjugate Distance	1641.73±9	496.32±9	321.05±9											H ₂	-70.8	
Flange Focal Distance	55.73±0.5	63.31±0.5	73.48±0.5	Entrance Pupil Position	17.33	TOLERANCE : LINEARITY TOLERANCES ±0.05 ANGULAR TOLERANCES ARE±30' DRAFT ANGLES AREA±0.5°/SIDE 三角法 					材 料(环 保)		单 位	比 例		
EFL	60		Exit Pupil Position	-69.29	mm								1:1			
Max image	ø64		设计 朱周德 2014-08-15 校 对 审 核 批 准								名 称	LS6016A技术规格图		页 码		
F/#	4													1/1		
Distortion	0.6%	0.19%												0.12%		
FOV	1591.2	386.92						192.5								
Illumination	45%							1					代 号	LS6016A-SPEC		版 本
IMAGE QUALITY			标 记	处 数	更改文件号	担 当	变更日期									V1
AXIS	ø45	ø64														
80lp/mm	50lp/mm	40lp/mm														