



A

B

C

D

E

F

A

B

C

D


E

F

Object plane

Image

W.D

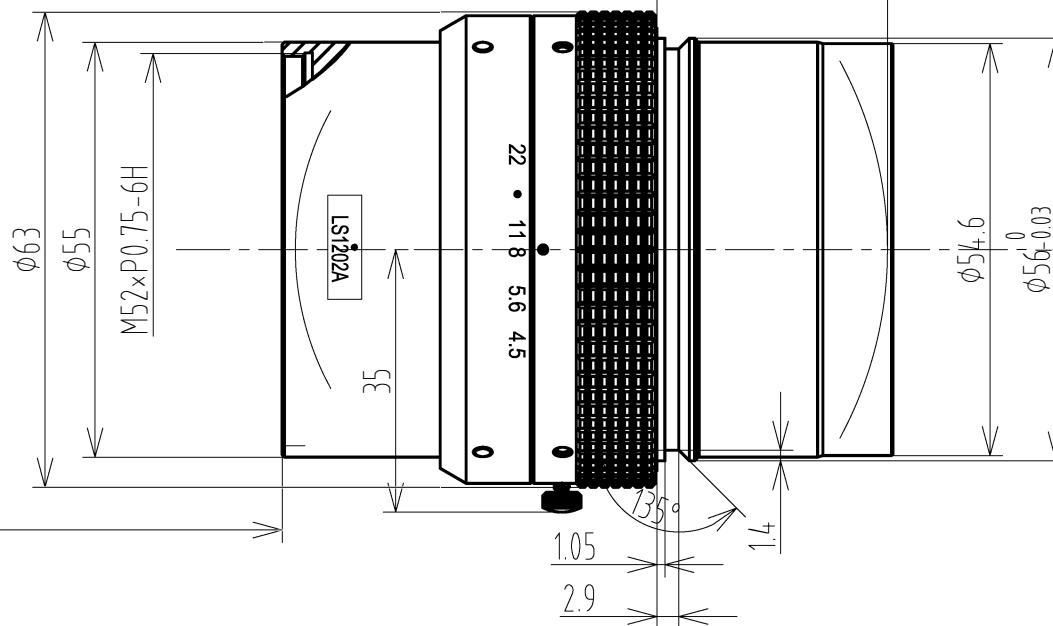


Main Specification			
Magnification	0.18X	0.2X	0.24X
Working Distance	717.3±5	652.4±5	550.87±5
Image Distance	89.8±2.5	92.17±2.5	97.05±2.5
Conjugate Distance	887.35±9	824.9±9	728.2±9
Flange Focal Distance	120.4	122.8	127.6
Max image	φ62		
F/#	4.5		
EFL	116		
FOV	28°		
ENP Diameter	23		
Distortion	<0.01%		
IMAGE QUALITY			
AXIS	φ46.2	φ66	

Image space NA	0.083
Object space NA	0.0167
Entrance pupil diameter	23
Entrance pupil position	35.26
Exit pupil diameter	30.93
Exit pupil position	-185.7

注:

Logo上的圆点粘贴位置与成像面垂直为最佳成像点。

TOLERANCE:
LINEARITY TOLERANCES ±0.05
ANGULAR TOLERANCES ARE ±30°
DRAFT ANGLES AREA ±0.5°/SIDE



材料(环保)

单位

比例

mm

1:1

设计 朱周德 2017-03-24

校对

审核

批准

名称

代号

版本

V0

LS1202A技术规格图

LS1202A-SPEC

页码

1/1

版本

V0

标记 处数 更改文件号 担当 变更日期