



A

B

C

D

E

F

A


B

C

D

E

F

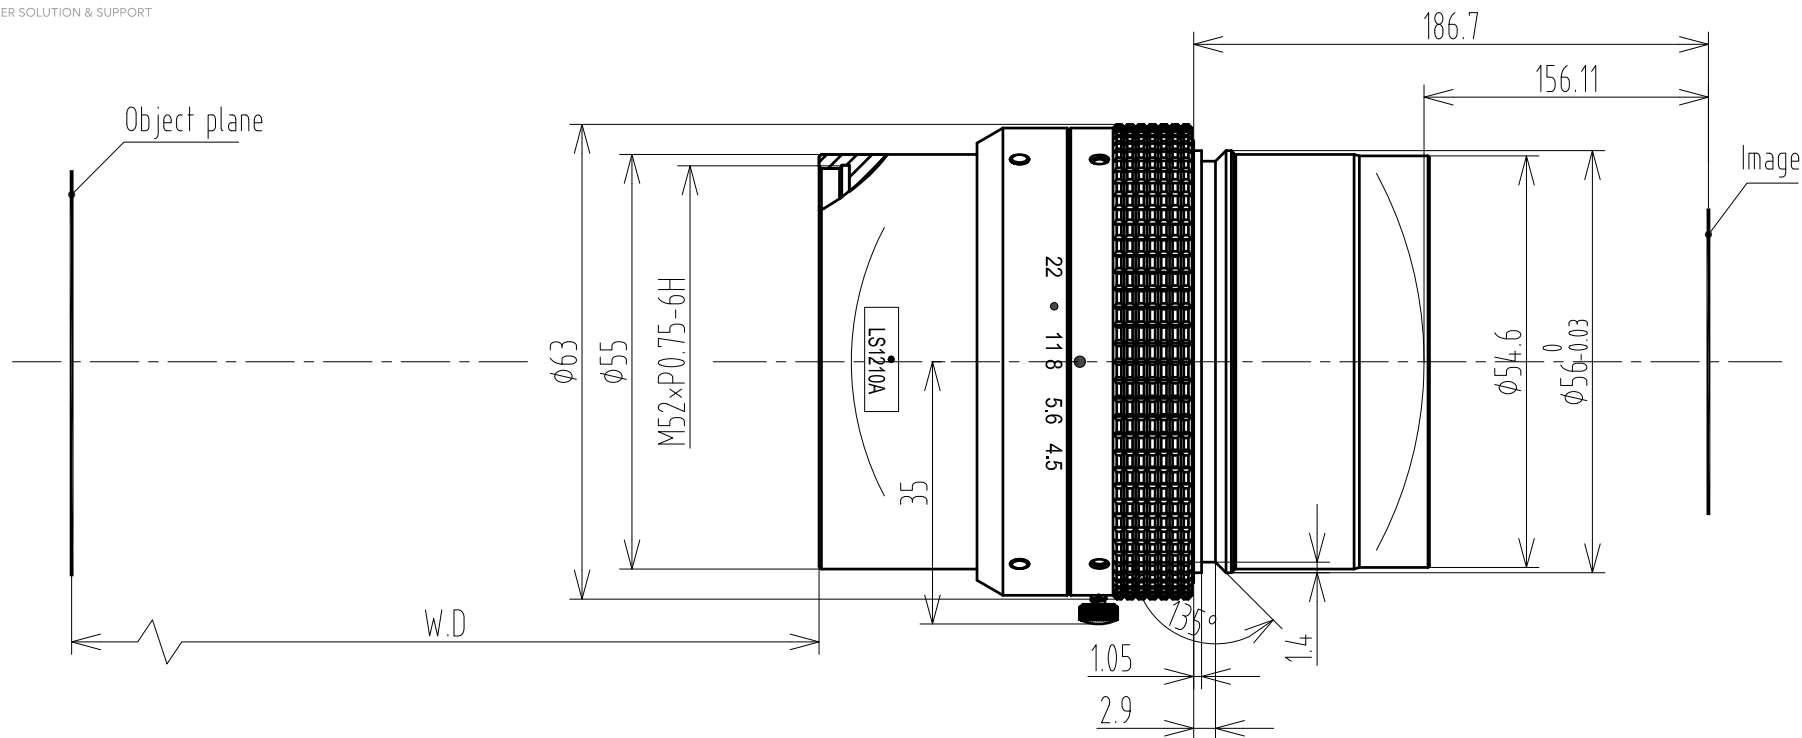


Main Specification			
Magnification	0.9X	1.0X	 1.1X
Working Distance	176.7±5	164.2±5	153.7±5
Image Distance	144.8±2.5	156.11±2.5	167.67±2.5
Conjugate Distance	401.8±9	400.56±9	401.67±9
Flange Focal Distance	175.4	186.7	198.3
Max image	ø62		
F/#	4.5		
EFL	116		
FOV	28°		
ENP Diameter	25.6		
Distortion	<0.05%		
IMAGE QUALITY			
AXIS	ø46.2	ø66	

Image space NA	0.062
Object space NA	0.062
Entrance pupil diameter	25.63
Entrance pupil position	38.63
Exit pupil diameter	30.93
Exit pupil position	-249.65

注:

Logo上的圆点粘贴位置与成像面垂直为最佳成像点。

TOLERANCE:
LINEARITY TOLERANCES ±0.05
ANGULAR TOLERANCES ARE ±30°
DRAFT ANGLES AREA ±0.5°/SIDE



材料(环保)

单位

比例

mm

1:1

设计 朱周德 2017-03-30

校对

审核

批准

名称

代号

版本

V1

LS1210A技术规格图

LS1210A-SPEC



1

处数

1

更改文件号

朱周德

担当

2017,06,19

变更日期

朱周德

批准