



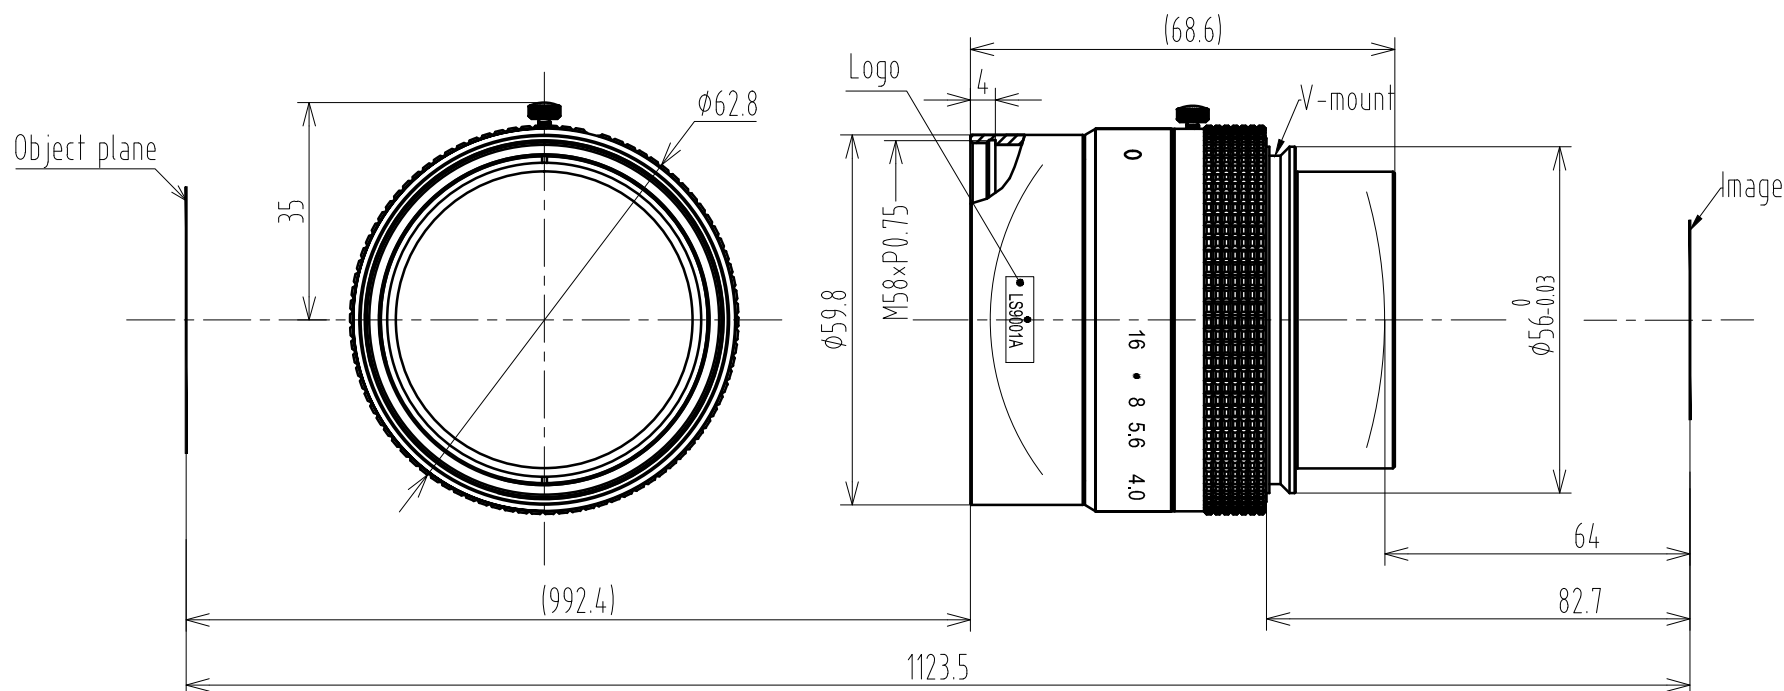

Main Specification				Image space NA		0.1	
Magnification	0.14X	0.1X	0.08X	Object space NA		0.01	
Working Distance	722±5	992.4±5	1229.2±5	Entrance pupil diameter		21.58	
Conjugate Distance	856.86±9	1123.5±9	1358.34±9	Entrance pupil position		42.87	
Flange Focal Distance	87±0.5	82.7±0.5	81.3±0.5	Exit pupil diameter		22.27	
Max image circle	ø64			Exit pupil position		-107.16	
F/#	4.0-16						
EFL	90						
Distortion	0.01%						
IMAGE QUALITY							
AXIS	ø46.2	ø66					
200lp/mm	125lp/mm	125lp/mm		标记	处数	更改文件号	担当 变更日期

注：
Logo上的圆点粘贴位置与成像面垂直为最佳成像点。

TOLERANCE:
LINEARITY TOLERANCES ± 0.05
ANGULAR TOLERANCES ARE $\pm 30'$
DRAFT ANGLES AREA $\pm 0.5^\circ$ /SIDE



材料(环保) 单位 比例
mm 1:1

设计	朱周德	2016-11-24	名称	LS9001A技术规格图	页码
校对			代号	LS9001A-SPEC	1/1
审核					版本
批准					V0