





Main Specification

Magnification	0.23X	0.26X	0.28X
Working Distance	555.5±5	497.85±5	466.6±5
Image Distance	101.14±2.5	104.57±2.5	106.89±2.5
Conjugate Distance	726.28±9	672.16±9	643.08±9
Flange Focal Distance	124.72±0.5	128.3±0.5	130.47±0.5
Max image	φ66		
F/#	3.8		
EFL	114		
FOV	28.6°		
ENP Diameter	27.12		
Distortion	0.01%		
Structure	8G		

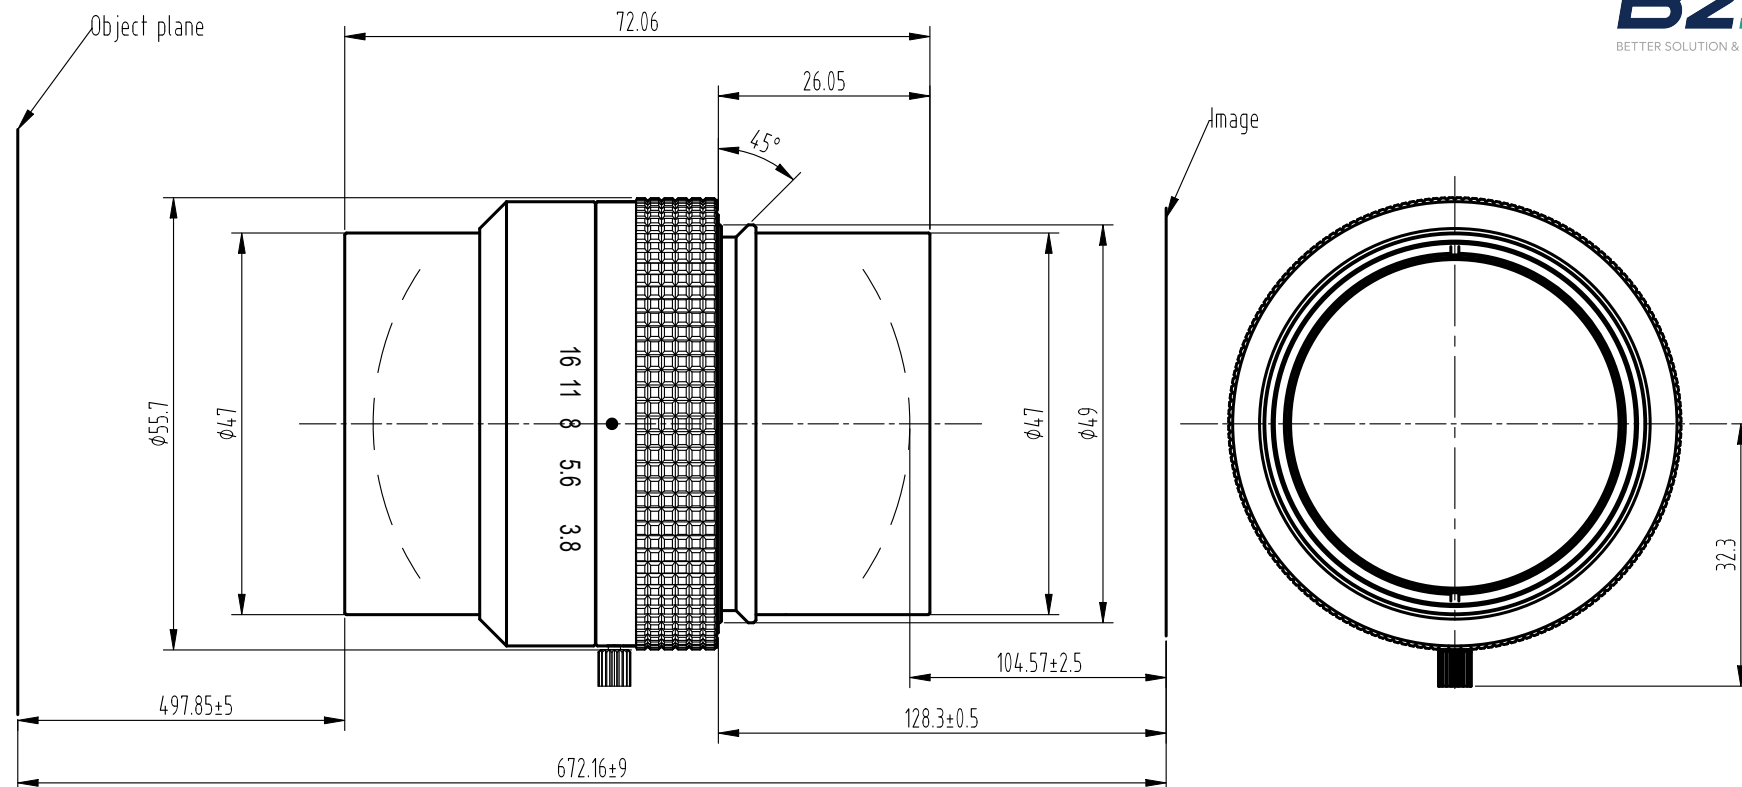

TOLERANCE :
LINEARITY TOLERANCES ±0.05
ANGULAR TOLERANCES ARE ±30'
DRAFT ANGLES AREA ±0.5°/SIDE



材料(环保)

单位 比例

mm -

名称

LS1626A技术规格图

页码 1/1

代号

LS1626A-SPEC

版本 V05

IMAGE QUALITY

AXIS	φ46.2	φ66
200lp/mm	160lp/mm	160lp/mm



1

刘勇

2023,05,19

校对

朱周德

2014,07,29

审核

批准



倍率参数变更

朱周德

2014,07,29

审核

批准

标记

处数

更改文件号

担当

变更日期

批准