


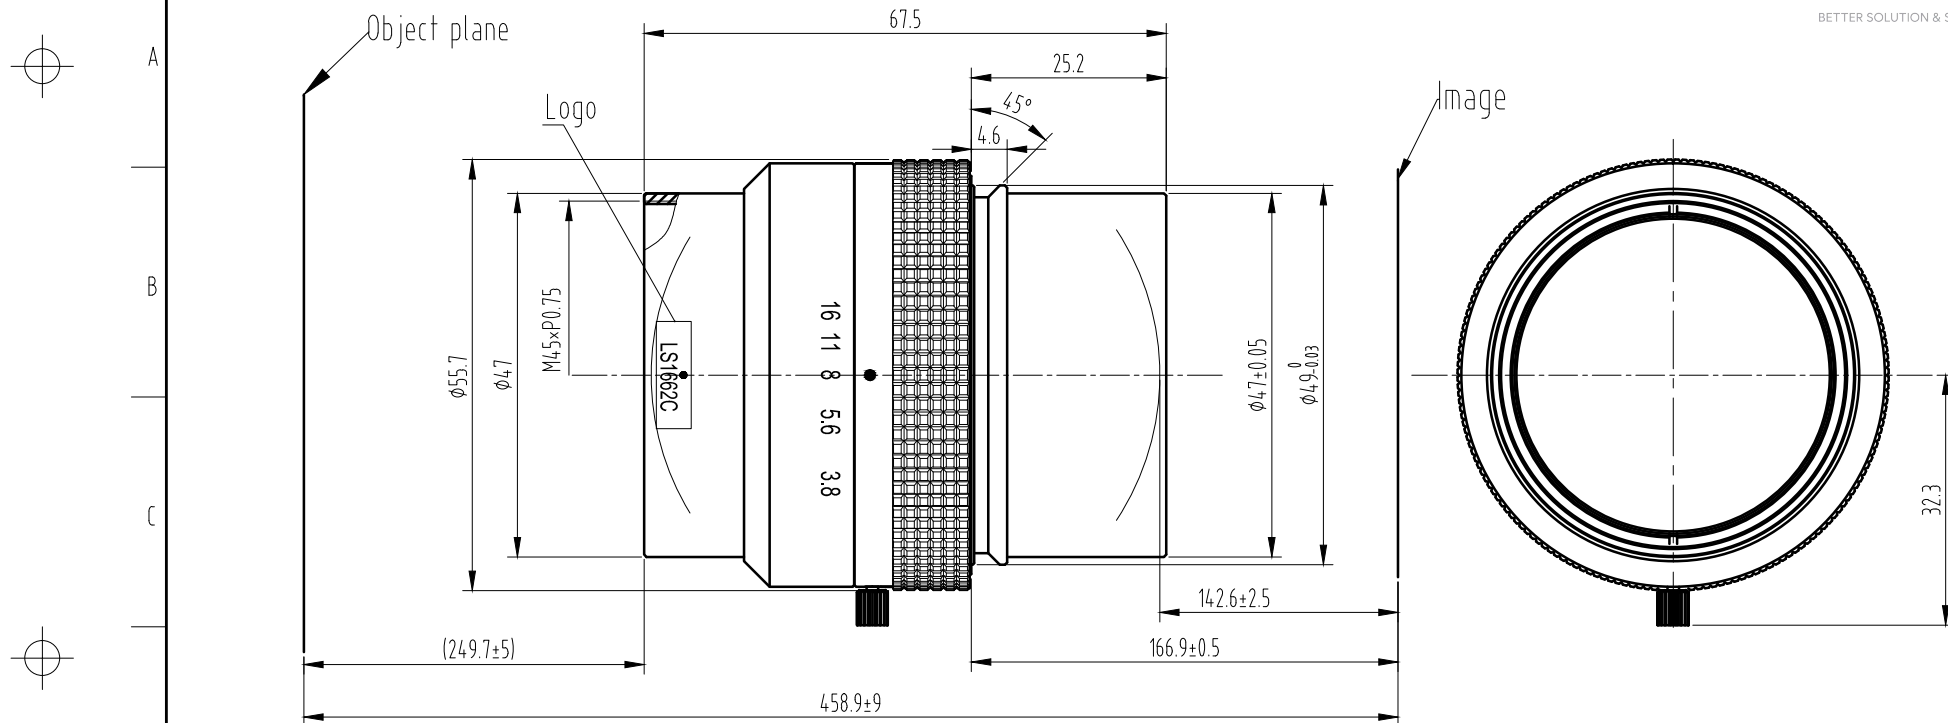

Main Specification

Magnification	0.59X	0.625X	0.67X
Working Distance	260.5±5	249.7±5	237.5±5
Image Distance	138.6±2.5	142.6±2.5	147.6±2.5
Conjugate Distance	465.7±9	458.9±9	451.7±9
Flange Focal Distance	163±0.5	166.9±0.5	172±0.5
Max image	1 ø82		
F/#	3.8		
EFL	116		
FOV	26.2°		
ENP Diameter	ø29.8		
Distortion	0.001%		
Structure	8G		

IMAGE QUALITY		
AXIS	ø46.2	1 ø82
200lp/mm	160lp/mm	160lp/mm


Image space NA	0.082
Object space NA	0.051
Entrance pupil diameter	29.8
Entrance pupil position	41.5
Exit pupil diameter	31.26
Exit pupil position	-191.4

1	2	朱周德	2017,11,30
标记	处数	更改文件号	担当
		变更日期	批准

注:

Logo上的圆点粘贴位置与成像面垂直为最佳成像点。

TOLERANCE:
LINEARITY TOLERANCES ±0.05
ANGULAR TOLERANCES ARE±30'
DRAFT ANGLES AREA±0.5°/SIDE



材料(环保)	单位	比例
-	MM	1:1
名称	规格书	
部番	LS1662C-SPEC	
商品代号		
设计	页码	1/1
校对	版本	1/1
审核	版本	V1
批准	版本	V1