




Main Specification				Image space NA	
Magnification	0.6X	0.667X	0.72X	Object space NA	0.0617
Working Distance	345.9±5	3212±5	304.9±5	Entrance pupil diameter	316
Conjugate Distance	605.36±9	590.5±9	582.04±9	Entrance pupil position	61.14
Flange Focal Distance	205.9±0.5	215.3±0.5	223.5±0.5	Exit pupil diameter	28.84
Max image circle	$\phi 82$			Exit pupil position	-233.08

注：
Logo上的圆点粘贴位置与成像面垂直为最佳成像点。

TOLERANCE:
LINEARITY TOLERANCES ± 0.05
ANGULAR TOLERANCES ARE $\pm 30'$
DRAFT ANGLES AREA $\pm 0.5^\circ$ /SIDE

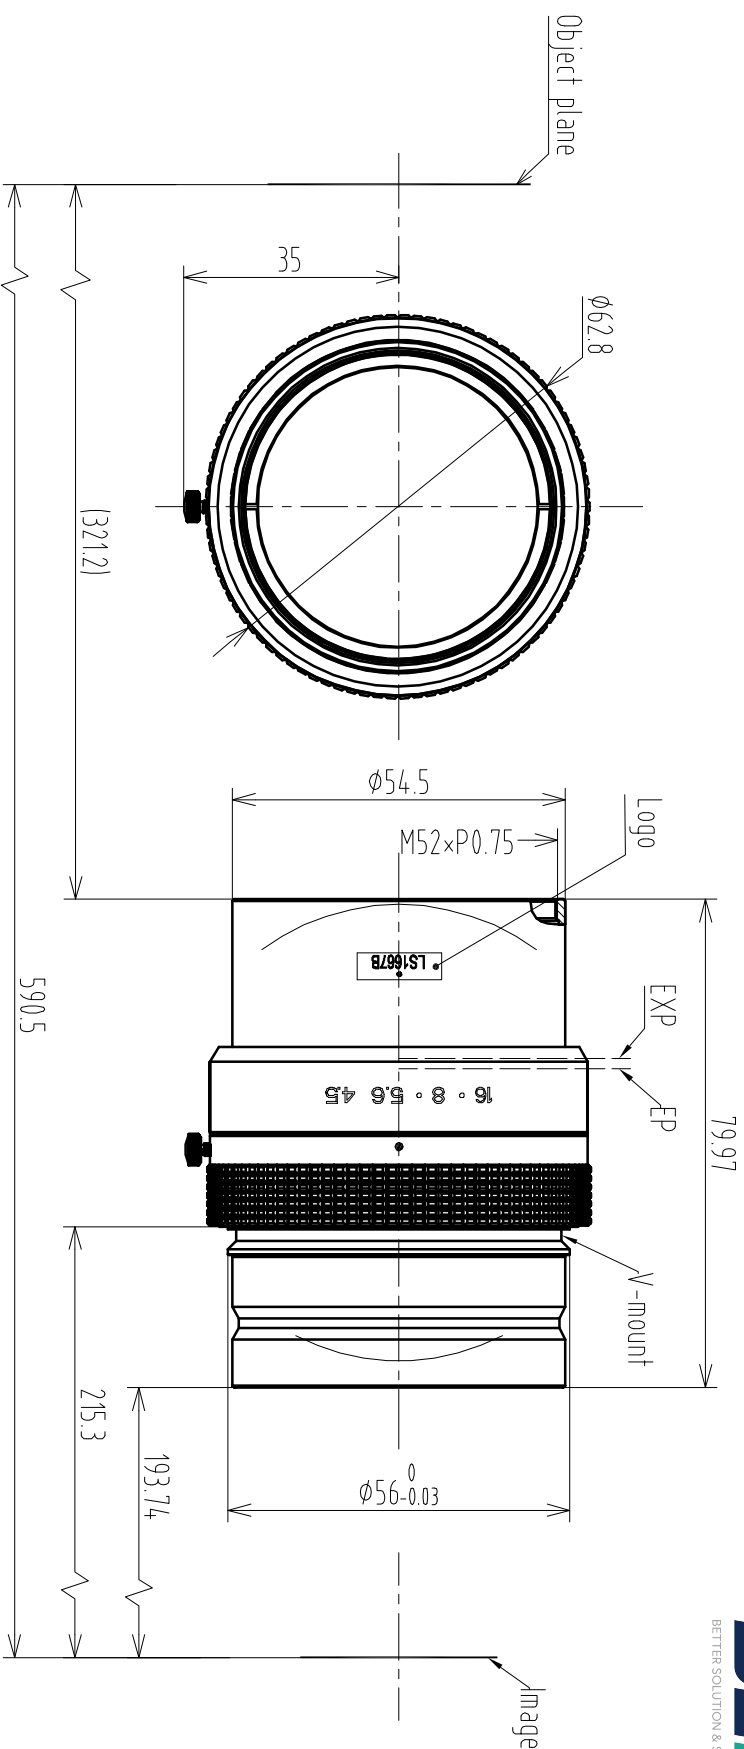

材料(环 保)

单位

比例

名称

LS1667B规格书

页码

1/1

IMAGE QUALITY

AXIS	$\phi 4.62$	$\phi 66$	$\phi 82$
200lp/mm	160lp/mm	125lp/mm	125lp/mm

标记

处数

更改文件号

担当

变更日期

批准

代号

LS1667B-SPEC

版本

V0