
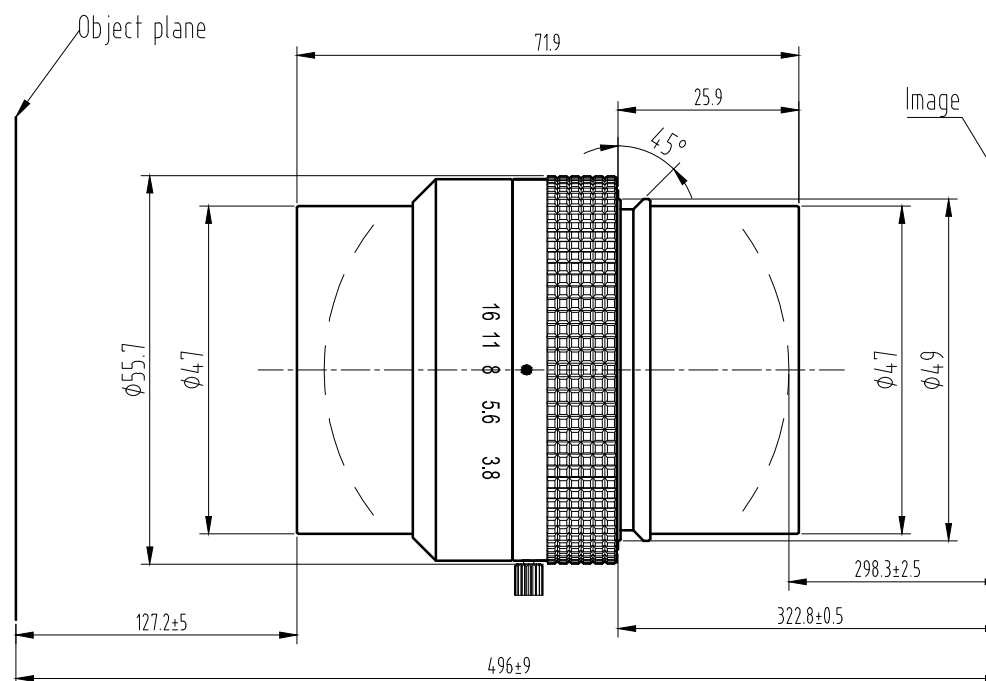


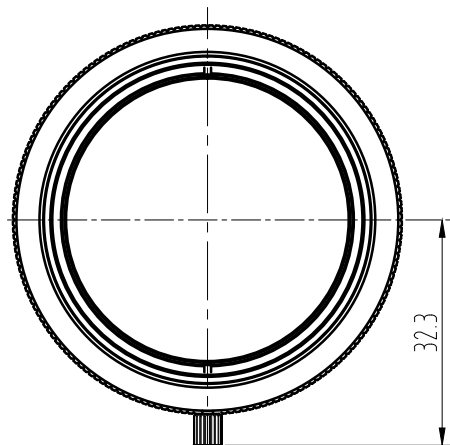

Main Specification


Magnification	-1.75	-2	-2.25
Working Distance	135.7±5	127.2±5	121±5
Image Distance	268.4±2.5	298.3±2.5	326.4±2.5
Conjugate Distance	474.7±9	496±9	517.9±9
Flange Focal Distance	292.9±0.5	322.8±0.5	350.9±0.5
Max image	φ84		
F/#	3.8		
EFL	116		
FOV	11.3°		
ENP Diameter	30.52		
Distortion	0.0008%		
Structure	8G		

IMAGE QUALITY

AXIS	φ46.2	φ84
200lp/mm	160lp/mm	160lp/mm



TOLERANCE:
LINEARITY TOLERANCES ±0.05
ANGULAR TOLERANCES ARE ±30°
DRAFT ANGLES AREA ±0.5°/SIDE



材料(环保)

单位 比例
mm 1:1

设计 朱周德 2014-07-07

校对

审核

批准

名称

代号

LS1620A技术规格图

LS1620A-SPEC

页码
1/1

版本
V2