



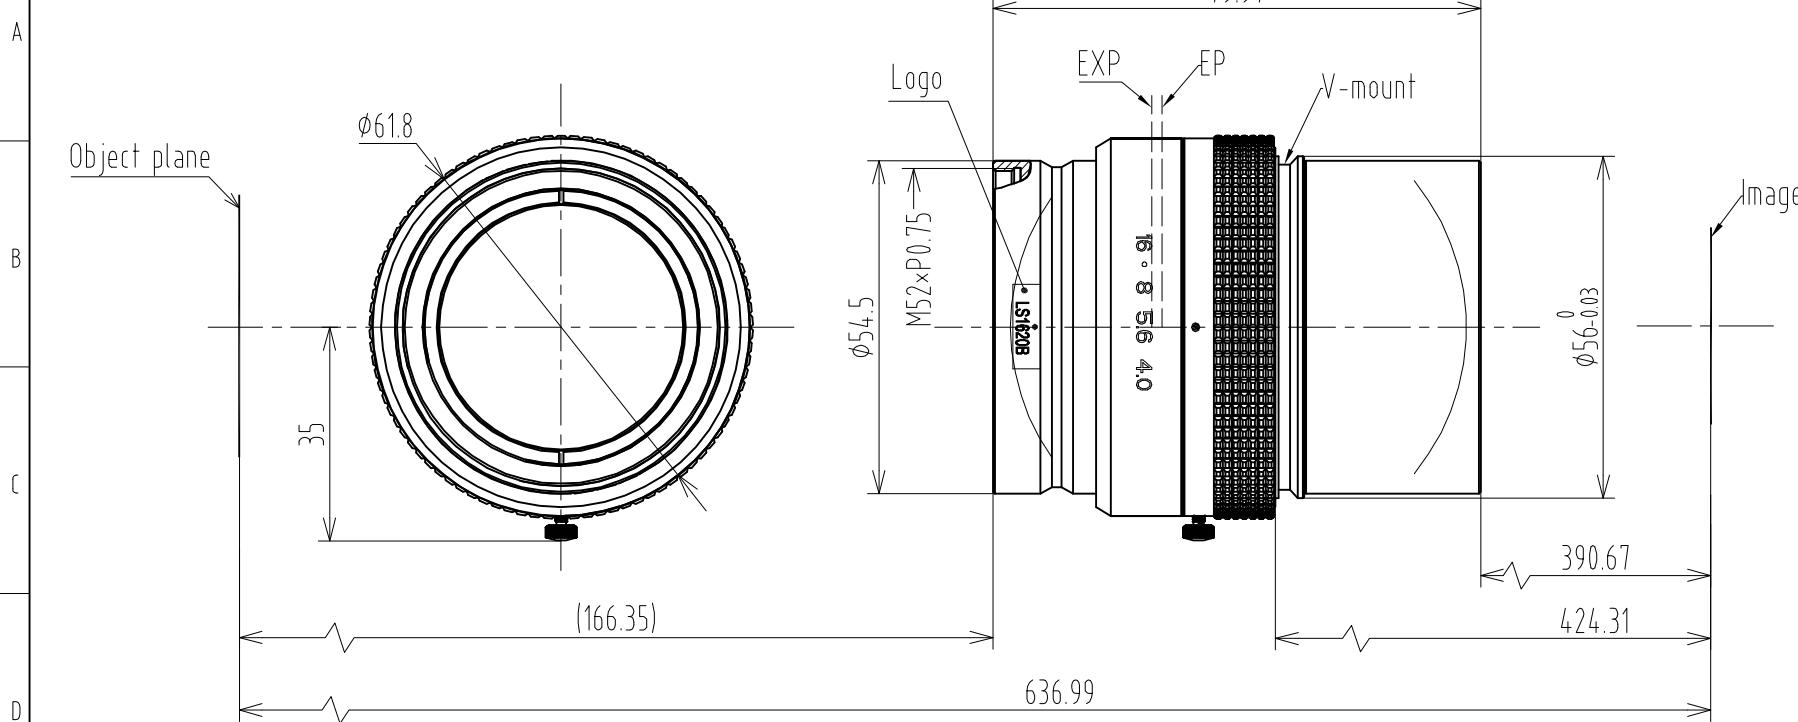

E	Main Specification				Image space NA			0.04	
	Magnification	1.7X	2X	2.4X	Object space NA			0.07	
	Working Distance	179±5	166.35±5	154±5	Entrance pupil diameter			30.9	
	Conjugate Distance	606±9	636.99±9	683±9	Entrance pupil position			42.4	
	Flange Focal Distance	380±0.5	424.31±0.5	482±0.5	Exit pupil diameter			32.9	
	Max image circle	ø82			Exit pupil position			-450	
	F/#	4.0-16							
F	EFL	120							
	Distortion	0.002%							
	IMAGE QUALITY								
	AXIS	ø46.2	ø66	ø82					
	200lp/mm	160lp/mm	125lp/mm	125lp/mm	标记	处数	更改文件号	担当	变更日期

注：
Logo上的圆点粘贴位置与成像面垂直为最佳成像点。

TOLERANCE :
LINEARITY TOLERANCES ± 0.05
ANGULAR TOLERANCES ARE $\pm 30'$
DRAFT ANGLES AREA $\pm 0.5^\circ$ /SIDE



材料(环保)

单位
mm

比例
1:1

设计 朱周德 2015-05-05
校对
审核
批准

名称
代号

LS1620B技术规格图

LS1620B-SPEC

页码
1/1
版本
V0