
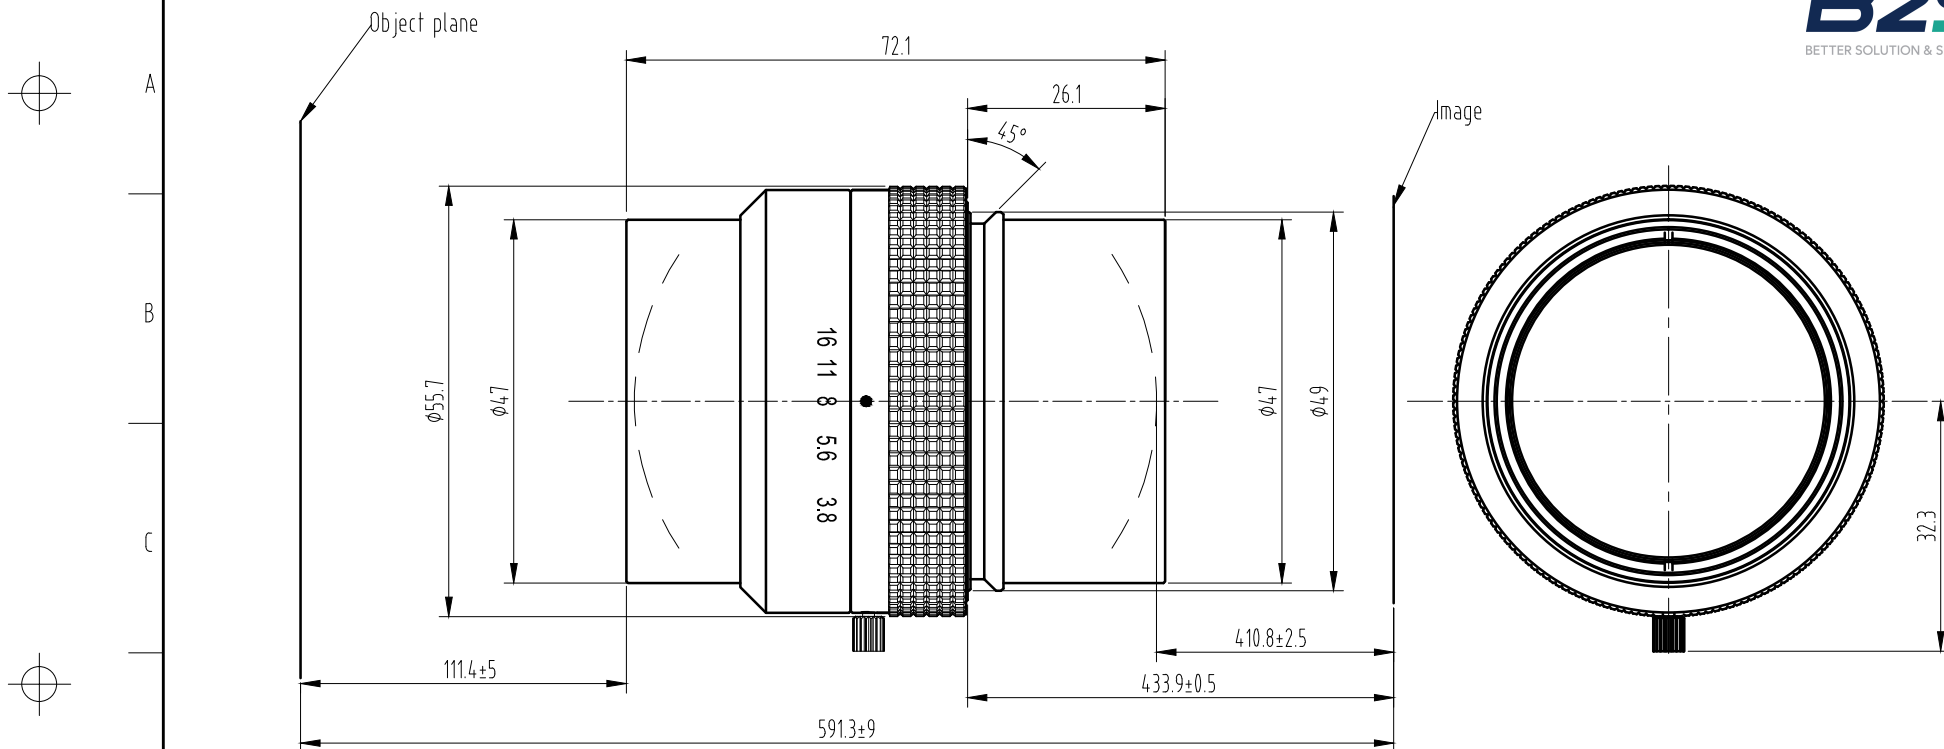




Main Specification			
Magnification	-2.5	-3	-4.5
Working Distance	119.2±5	111.4±5	98.6±5
Image Distance	352.8±2.5	410.8±2.5	583.8±2.5
Conjugate Distance	541.1±9	591.3±9	751.5±9
Flange Focal Distance	375.9	433.9	606.9
Max image	ø84		
F/#	4.2		
EFL	116		
FOV	13.83°		
ENP Diameter	29.52		
Distortion	0.001%		
Structcure	8G		
IMAGE QUALITY			
AXIS	ø46.2	ø84	
200lp/mm	160lp/mm	160lp/mm	

					TOLERANCE : LINEARITY TOLERANCES ±0.05 ANGULAR TOLERANCES ARE±30' DRAFT ANGLES ARE±0.5°/SIDE			材料(环保)	单位	比例	
									mm	1:1	
					设计	朱周德	2014-07-15	名称	LS1630A技术规格图		页码
					校对						1/1
		倍率参数变更	朱周德	2014,07,15	审核			代号	LS1630A-SPEC		版本
标记	处数	更改文件号	担当	变更日期	批准						V1