


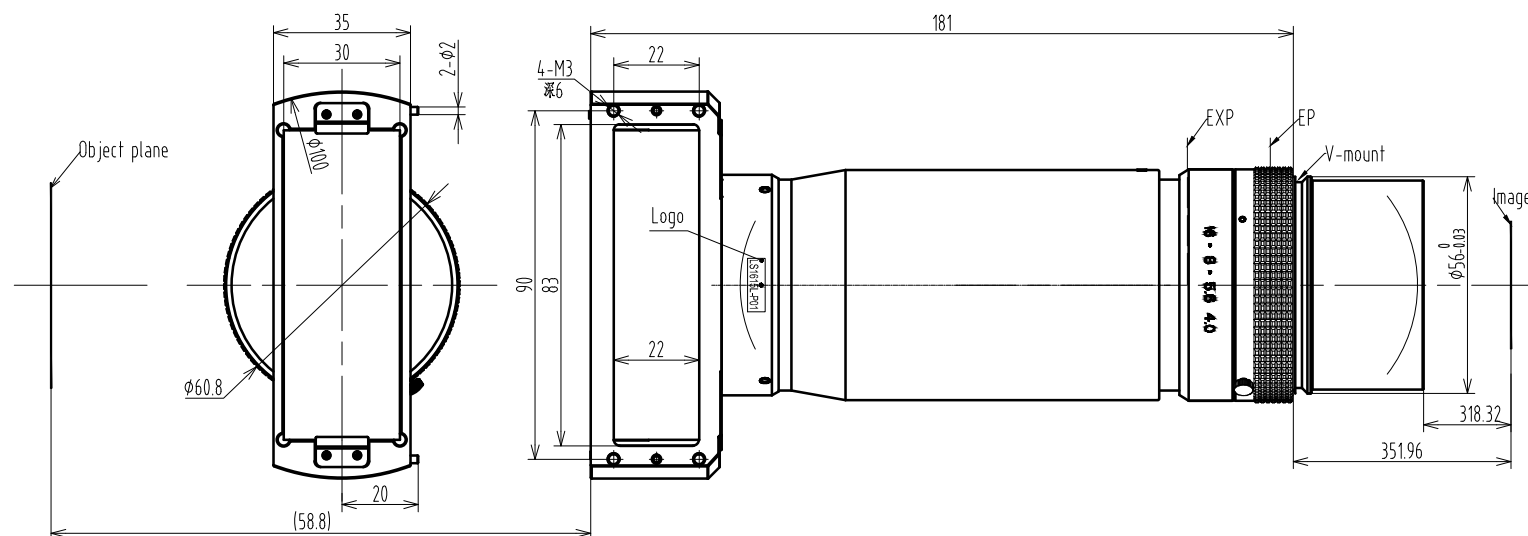


Main Specification				Image space NA		0.049	
Magnification	1.4X	1.5X	1.6X	Object space NA		0.076	
Working Distance	65.6±5	58.8±5	52.7±5	Entrance pupil diameter		33.1	
Conjugate Distance	584.2±9	592.1±9	600.28±9	Entrance pupil position		61.1	
Flange Focal Distance	337.59±0.5	351.96±0.5	366.56±0.5	Exit pupil diameter		36.94	
Max image circle	ø82			Exit pupil position		-379.3	
F/#	4.3-16						
EFL	145						
Distortion	0.001%						
Structure	8G						
IMAGE QUALITY							
AXIS	ø46.2	ø66	ø82				
200lp/mm	100lp/mm	80lp/mm	80lp/mm	标记	处数	更改文件号	担当 变更日期

注：

Logo上的圆点粘贴位置与成像面垂直为最佳成像点。

TOLERANCE:
LINEARITY TOLERANCES ±0.05
ANGULAR TOLERANCES ARE ±30'
DRAFT ANGLES ARE ±0.5°/SIDE



材料(环保)

单位

MM

比例

N: 1

设计			名称	规格书	页码
校对			代号	LS1615L-P01-SPEC	1/1
审核					版本
批准					V03

标记	处数	更改文件号	担当	变更日期
----	----	-------	----	------