


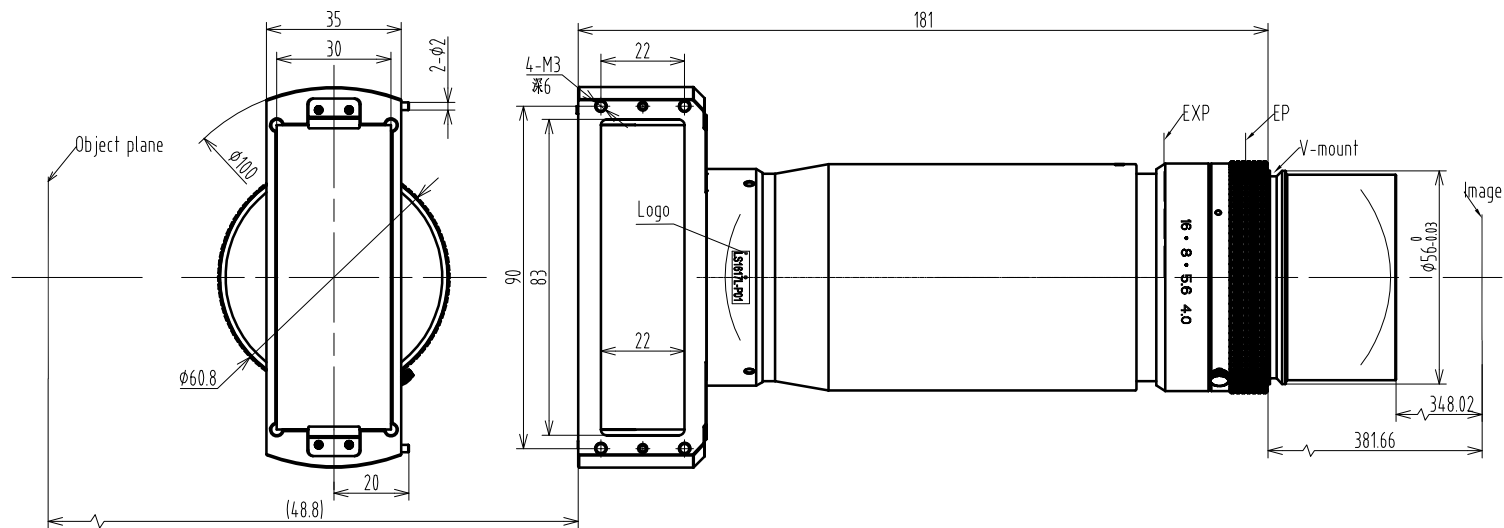


Main Specification				Image space NA		0.045	
Magnification	1.45X	1.7X	2X	Object space NA		0.076	
Working Distance(A+B)	67.2±5	48.83±5	35.7±5	Entrance pupil diameter		33.3	
Conjugate Distance	586.5±9	611.85±9	643.1±9	Entrance pupil position		62.1	
Flange Focal Distance	337.86±0.5	381.66±0.5	425.6±0.5	Exit pupil diameter		36.8	
Max image circle	ø82			Exit pupil position		-409	
F/#	3.8-16						
EFL	116						
Distortion	0.001%						
Structure	8G						
IMAGE QUALITY							
AXIS	ø46.2	ø66	ø82				
200lp/mm	100lp/mm	80lp/mm	80lp/mm	标记	处数	更改文件号	担当 变更日期

注：

Logo上的圆点粘贴位置与成像面垂直为最佳成像点。

TOLERANCE :
LINEARITY TOLERANCES ± 0.05
ANGULAR TOLERANCES ARE $\pm 30'$
DRAFT ANGLES AREA $\pm 0.5^\circ$ /SIDE



材料(环保)

单位

MM

比例

0.5:1

设计

校对

审核

批准

名称

代号

规格书

LS1617L-P01-SPEC

页码

1/1

版本

V3