

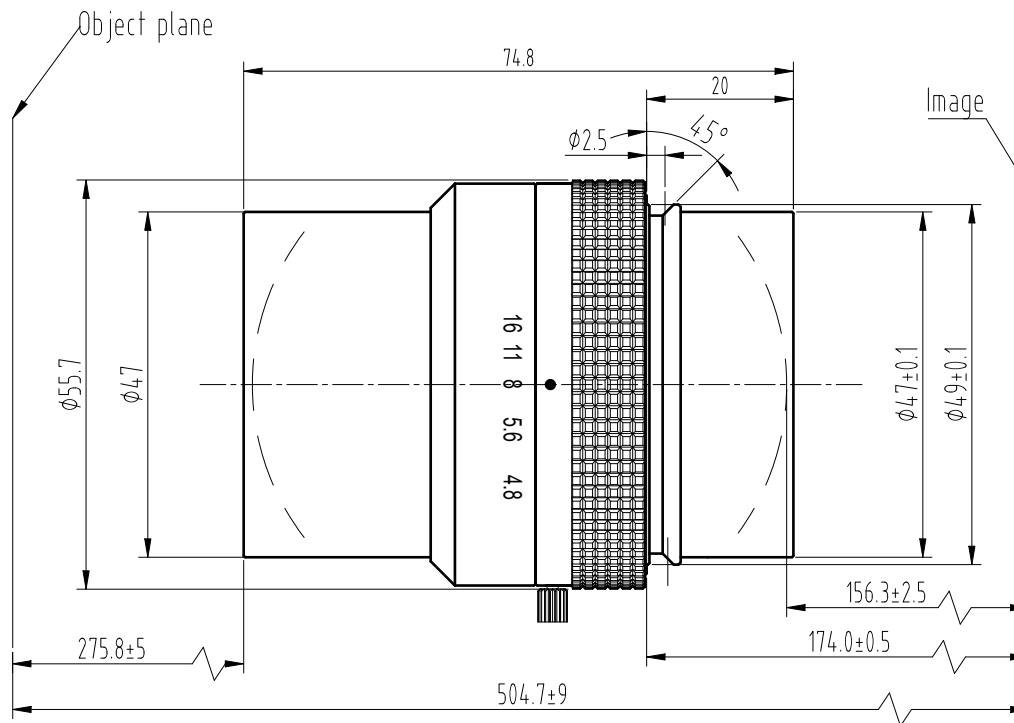


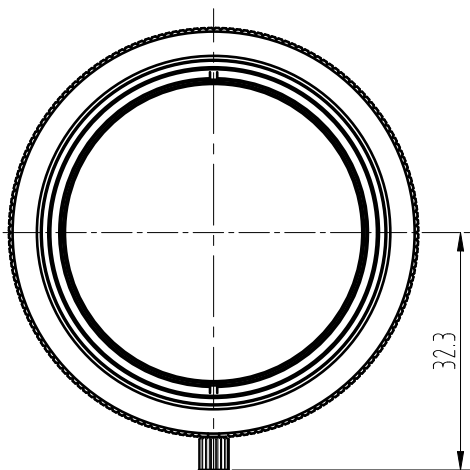

Main Specification

Magnification	-0.52	-0.573	-0.64
Working Distance	297.2±5	275.8±5	253.9±5
Image Distance	150.0±2.5	156.3±2.5	164.4±2.5
Conjugate Distance	519.7±9	504.7±9	490.8±9
Flange Focal Distance	167.7	174.0	182.1
Max image	ø62		
F/#	4.8		
EFL	120		
FOV	23°		
ENP Diameter	24.75		
Distortion	<0.01%		
Structcure	7G		
IMAGE QUALITY			
AXIS	ø46.2	ø66	
200lp/mm	160lp/mm	160lp/mm	

TOLERANCE :
LINEARITY TOLERANCES ±0.05
ANGULAR TOLERANCES ARE ±30'
DRAFT ANGLES AREA ±0.5°/SIDE



材料(环保)

单位
mm
比例
1:1

设计
校对
审核
批准

名称
代号

规格书

G-LI1606A-SPEC

页码
1/1
版本
V01