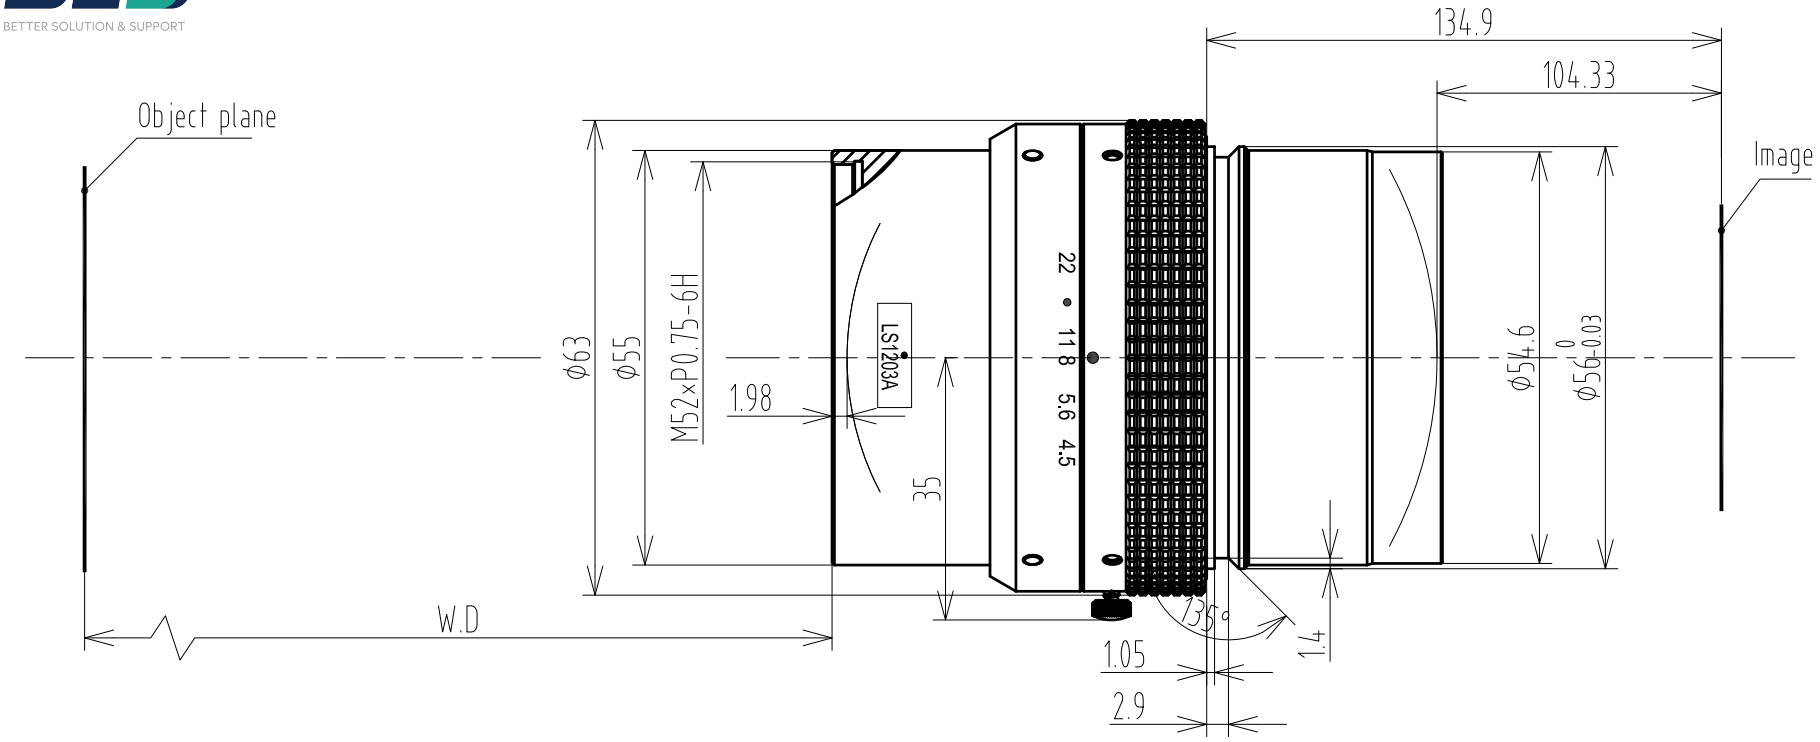


Main Specification			
Magnification	0.29X	0.33X	0.4X
Working Distance	465±5	415.1±5	351.2±5
Image Distance	99.55±2.5	104.33±2.5	112.78±2.5
Conjugate Distance	644.85±9	599.7±9	544.58±9
Flange Focal Distance	130.1	134.9	143.4
Max image	φ62		
F/#	4.5		
EFL	116		
FOV	29°		
ENP Diameter	23.37		
Distortion	<0.005%		
IMAGE QUALITY			
AXIS	φ46.2	φ66	

Image space NA	0.078
Object space NA	0.026
Entrance pupil diameter	23.37
Entrance pupil position	36.3
Exit pupil diameter	30.93
Exit pupil position	-197.88

注：

Logo上的圆点粘贴位置与成像面垂直为最佳成像点。

标记	处数	更改文件号	担当	变更日期

TOLERANCE:
. LINEARITY TOLERANCES ±0.05
. ANGULAR TOLERANCES ARE±30'
. DRAFT ANGLES AREA±0.5°/SIDE

三角法

设计	朱周德	2017-03-28	名称	LS1203A技术规格图
校对				
审核			代号	LS1203A-SPEC
批准				

材料(环保)	单位	比例
	mm	1:1

页码	版本
1/1	V0