


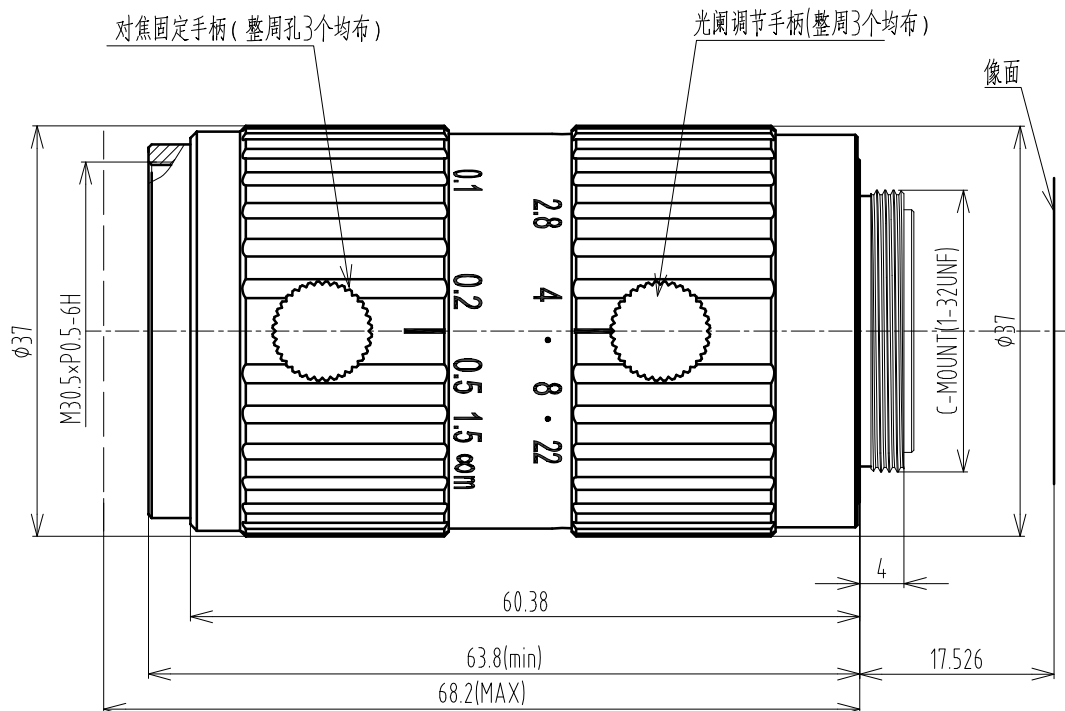

1.1" F2.8/25 C Mount

				Working distance	Optical Magnification	1.1" Field of View(mm)	
Focal Length		f=25mm			mm	H	V
Max Diameter (Ratio)		F=1:2.8~22			5000	0.005X	2820
Picture Size		1.1"(14.1×10.6mm)	1"(12.8×9.6mm)	2/3"(8.8×6.6mm)	2000	0.0125X	1128
Angle	H	31.6°	28.8°	20.4°	1000	0.0249X	566.3
	V	24.2°	22.1°	15.6°	900	0.0276X	510.8
	D	38.6°	35.4°	25.1°	800	0.0311X	453.4
Object Dimension at 450mm	H	255.9mm	232.3mm	159.7mm	700	0.0355X	397.2
	V	192.4mm	174.2mm	119.8mm	600	0.0414X	340.6
	D	319.4mm	290.4mm	199.6mm	550	0.0451X	312.6
Distortion (TV)		<0.1%	<0.1%	<0.1%	500	0.050X	282
Focus distance(min)		0.1m			450	0.0551X	255.9
Flange back		17.526mm in air			400	0.0619X	227.8
Back focus		13.5mm(min)			350	0.0706X	199.7
Filter screw size		M30.5×P0.5			300	0.0822X	171.5
Front/Rear Effective Dia		Front ϕ 20.2mm Rear ϕ 16.2mm			250	0.0984X	143.3
Mount		C-Mount			200	0.1225X	115.1
Temperature Range		-10~+50°C			150	0.162X	87
Storage Temperature Range		-20~+60°C			100	0.24X	58.8

					TOLERANCE: LINEARITY TOLERANCES ± 0.05 ANGULAR TOLERANCES ARE $\pm 30'$ DRAFT ANGLES AREA $\pm 0.5^\circ$ /SIDE				材 料 (环 保)		单 位	比 例
											mm	1:1
					设 计			名 称	FA2525A 规格		页 码	
					校 对				FA2525A SPEC		1/1	
					审 核			部 番			版 本	
版本	处数	更改文件号	担当	变更日期	批 准			商品代号			V0	