


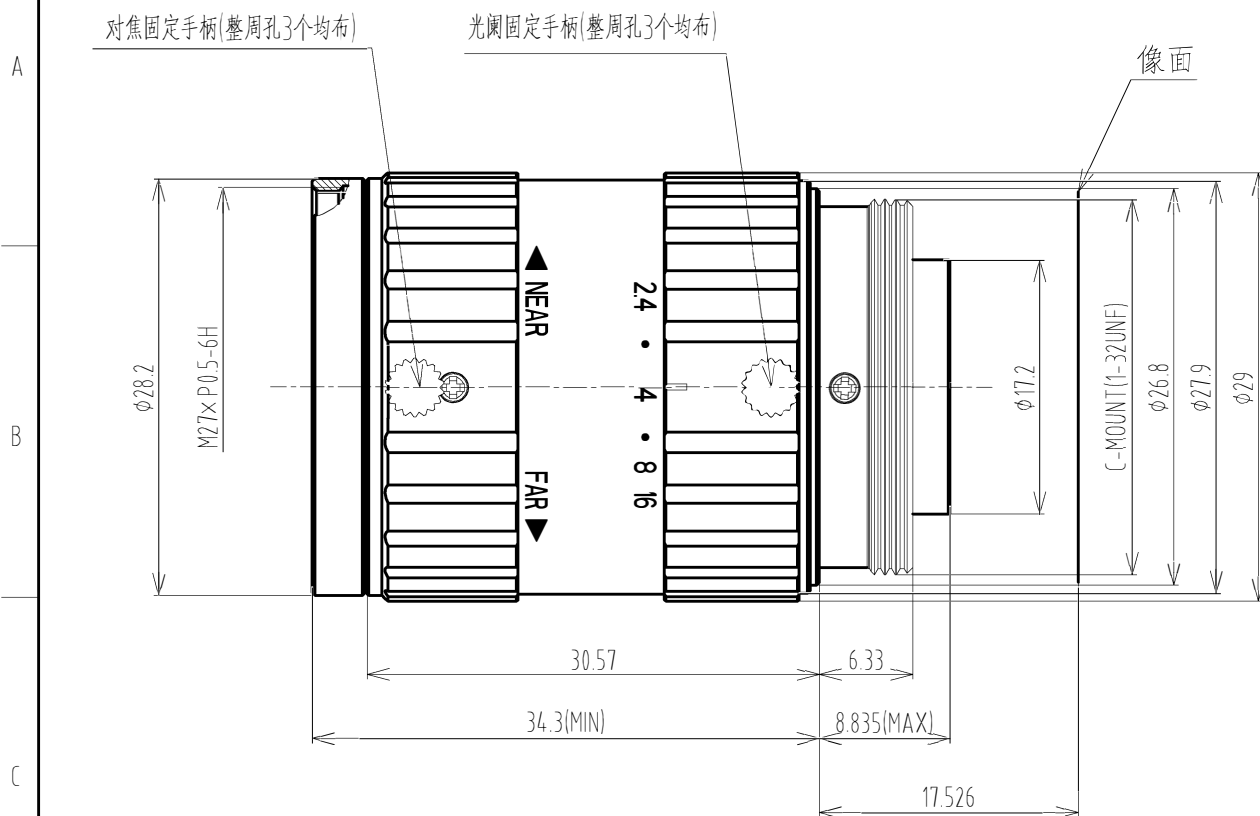

1/1.7" F2.4/25 C Mount				Working distance	Optical Magnification	1/1.7" Field of View(mm)	
Focal Length		f=25mm			mm	H	V
Max Diameter (Ratio)		F=1:2.4~16			5000	0.005X	1480.0
Picture Size		1/1.7"(7.4×5.6mm)	1/2"(6.4×4.8mm)	1/3"(4.8×3.6mm)	2000	0.013X	569.2
Angle	H	16.8°	14.6°	11.0°	1000	0.025X	296.0
	V	12.8°	11.0°	8.3°	900	0.028X	264.3
	D	21.2°	18.3°	13.7°	800	0.032X	231.3
Object Dimension at 200mm	H	54.8mm	47.4mm	35.6mm	700	0.036X	205.6
	V	41.5mm	35.6mm	26.7mm	600	0.043X	172.1
	D	69.1mm	59.3mm	44.1mm	550	0.047X	157.4
Distortion (TV)		<0.1%	< -0.1%	< -0.1%	500	0.051X	145.1
Focus distance(min)		0.1m-∞			450	0.057X	129.8
Flange back		17.526mm in air			400	0.065X	113.8
Back focus		12.05mm(min)			350	0.074X	100
Filter screw size		M27 X P0.5			300	0.088X	84.1
Front/Rear Effective Dia		Front φ14.3mm Rear φ9.2mm			250	0.106X	69.8
Mount		C-Mount			200	0.135X	54.8
Temperature Range		-10~+50°C			150	0.184X	40.2
Storage Temperature Range		-20~+60°C			100	0.288X	25.7
TOLERANCE: LINEARITY TOLERANCES ±0.05, ANGULAR TOLERANCES ARE ±30°, DRAFT ANGLES AREA ±0.5°/SIDE				三角法		材料(环保)	
						单位	比例
						mm	2:1
				名称	C-FA2513A 规格书		页码
				部番	C-FA2513A SPEC		1/1
				商品代号			版本
				设计			V02
				校对			
				审核			
				批准			
版本	处数	更改文件号	担当	变更日期			