
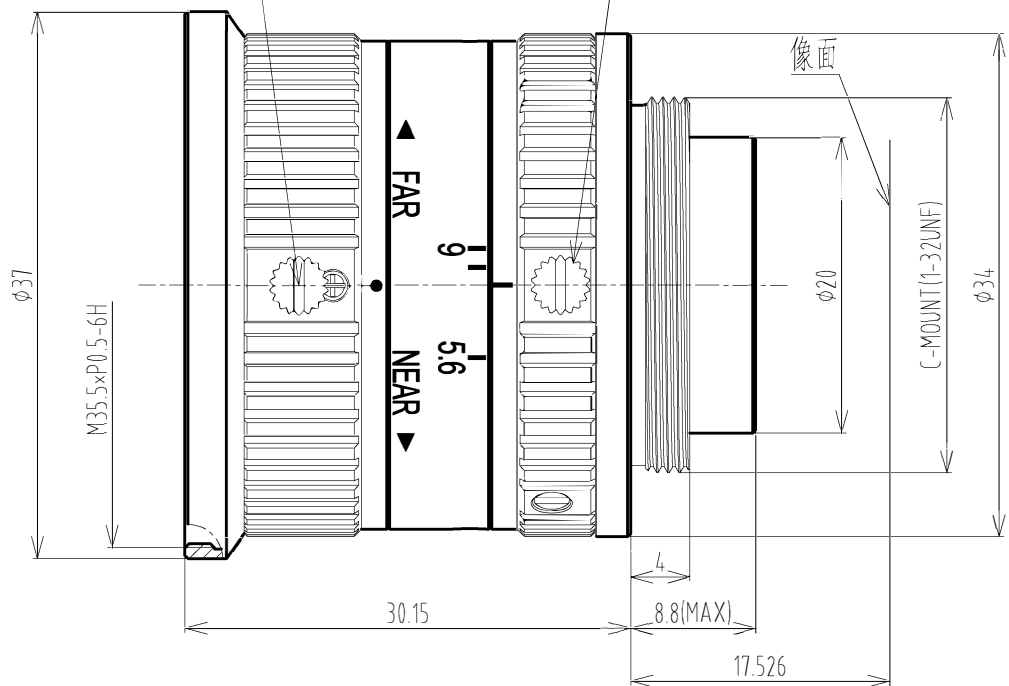


对焦调节手柄(整周3个均布)

光阑调节手柄(整周3个均布)



1" F5.6/20 C Mount

Focal Length		f=20mm							
Max Diameter (Ratio)		F=1:5.6		Working distance	Optical Magnification	1" Field of	View(mm)		
Picture Size		1"(12.8×9.6mm)	2/3"(8.8×6.6mm)						
Angle	H	35.4°	24.8°	mm		H	V		
	V	27°	18.7°	2000	0.01X	1280	960		
	D	43.6°	30.7°	1800	0.0111X	1153.2	864.9		
Object Dimension at 0.02x	H	640mm	440mm	1500	0.0133X	962.4	721.8		
	V	480mm	330mm	1300	0.0154X	831.2	623.4		
	D	800mm	550mm	1000	0.02X	640	480		
Distortion (TV)		<2%	<0.5%	900	0.0222X	576.6	432.4		
Focus distance(min)		0.1m		800	0.025X	512	384		
Flange back		17.526mm in air		700	0.0286X	447.6	335.7		
Back focus		9.2mm(min)		600	0.033X	387.9	290.9		
Filter screw size		M35.5×P0.5		500	0.04X	320	240		
Front/Rear Effective Dia		Front ϕ 13.6mm Rear ϕ 14.4mm		400	0.05X	256	192		
Mount		C-Mount		300	0.067X	191	143.3		
Temperature Range		-10~+50℃		200	0.1X	128	96		
Storage Temperature Range		-20~+60℃		100	0.2X	64	48		
				三角法 		材料(环保)	单位	比例	
							mm	1:1	
				设计	名称	FA2010A规格书		页 码	
				校 对				1/1	
				审 核				版 本	
版本	处数	更改文件号	担当	变更日期	批 准	代号	FA2010A-SPEC		V01